

## 2001 ACCORD - Front Door Panel Removal/Installation

### Special Tool Required

- Trim Pad Remover, Snap-on A 177, or equivalent, commercially available.


1. Remove the mirror mount cover . Take care not to scratch the door panel.
2. Remove the inner handle (A). Take care not to scratch the door panel.

-1 Pry out the cap (B), and remove the screw.


-2 Pull the inner handle forward and out half-way.

#### Fastener Location

► : Screw, 1

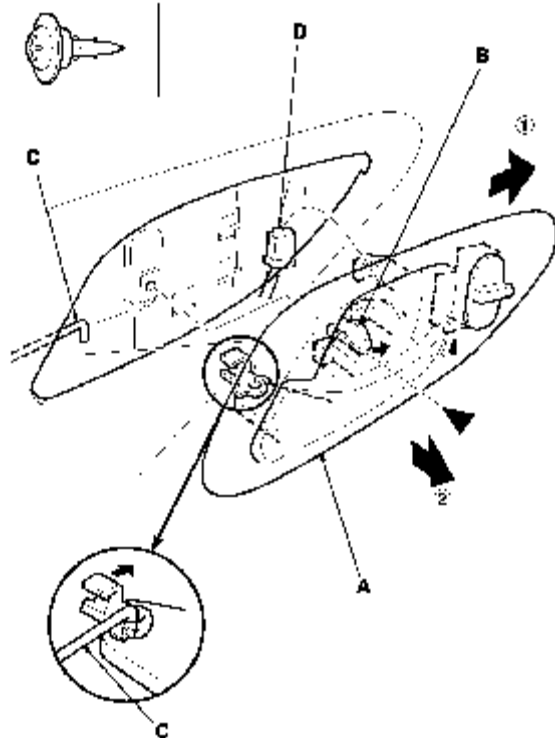

3. Remove the screw, and release the clips (A, B) that hold the door panel (C) with a commercially available trim pad remover (D), then remove the door panel by pulling it upward. Disconnect the power window switch connectors (E), and the power mirror switch connector (F) (driver's side), security indicator connector (G) (driver's side for some models), and courtesy light bulb socket (H). Remove the door panel with as little bending as possible to avoid creasing or breaking it.
4. Install the door panel in the reverse order of removal; make sure the connectors and the courtesy light bulb socket are plugged in properly, and the inner handle rod is connected properly.

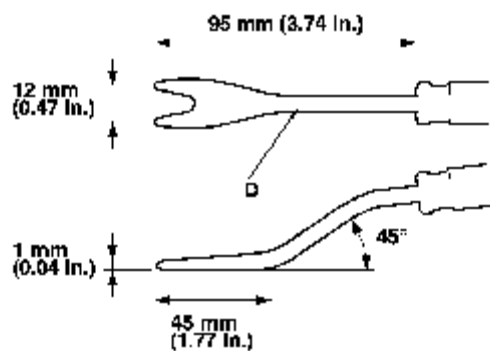

## Fastener Locations

► : Screw, 1      A > : Clip, 10      B ▷ : Clip, 1

